



—無段式溫度轉鈕
—遮風過濾網

Energy 1600 適用配件

訂購型號	說明
31A-W	Ø5mm圓嘴
30A1-W	20mm扁嘴
30B1-W	40mm扁嘴
119.334	壓力輪
27-5-W	快速拖焊嘴，圓形 5mm
27B2-W	快速拖焊嘴，三角形 7mm
990.804	U型口反射風嘴

Energy 3400 適用配件

訂購型號	說明
37A-1	70mm扁風嘴
37U-1	U型口反射風嘴
119.334	壓力輪

訂購號碼		Energy 3400	Energy 1600
電壓	V~	230	
功率	W	3400	1600
溫度	°C	20~550	20~600
風量(20°C)	l/min.	360	180
噪音度	Lpa(db)	65	65
靜壓	Pa	ca.3200	ca.2600
最大尺寸	mm	320*95 / 把手Ø 65	
重量	kg	1.15	1.05



energy

1600 3400

為專業人士設計的熱風機

功率強勁 適合多種熱風應用

塑料工程、無縫地磚...等塑料焊接。

帆布、頂棚、廣告看板、屋頂防水膜...等皮料貼合。

加熱、熱收縮、各種熱熔、加速化學變化...等現場使用。

1600
3400

應用範例




熱收縮



防水膜焊接



桶槽配管焊接

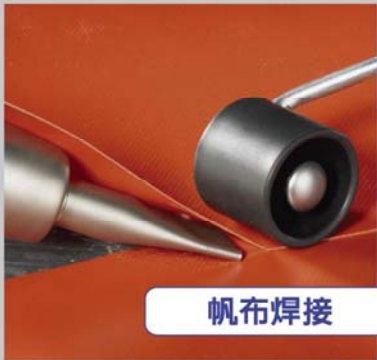

帆布焊接



無縫地磚焊接



除冰



銅管焊錫



擴管/彎管應用



塑料板材焊接



汽車燈罩修護



熱縮套管



螺絲鬆脫

熱風應用科技有限公司

<http://www.hotair.com.tw>

高雄市新興區金門街 107 號 4 樓之 1

TEL:07-229-2618 FAX:07-229-2619

E-mail:brielle924@gmail.com

專業銷售、技術諮詢、快速維修

版權歸熱風應用科技所有，未經同意不得自行翻印修改使用
本公司可隨時修正目錄內容